

Roof Coating

Mobile Home White Elastomeric

Water-based, specifically formulated with 100% acrylic resin for mobile homes. 5-year guarantee. Remains flexible from -10° to 160° F. No mixing, soap and water cleanup when wet.



Class A fire rating. No hazardous chemicals or solvents. VOC=less than 60 grams/liter. UL approved

0110342 4.75 Gallons

White Elastomeric

Ultra-high reflectivity for metal, concrete, bonded tar and gravel, foam, brick, wood, flat and barrel cement tile roofs.



100% acrylic elastomeric resin to keep interiors cooler with energy savings of up to 35%. Covers approx. 75-100 sq. ft. per gallon.

0110331 0.9 Gallon; 4/Ctn.

0110332 4.75 Gallons

Cool King Aluminum Roof Coating

A blend of select asphalts, aluminum pigments and fibers designed to reflect the sun's rays. Temperature directly under roof surface stays cooler in the summer and warmer in the winter. Dries silver. Reflects sunlight and saves energy costs. Coverage: metal surfaces approx. 70-100 sq. ft. per gallon; composite surfaces approx. 40-60 sq. ft. per gallon.



0110650 5 Gallon **0110653** 1 Gallon

Blue Label Aluminum Roof Coating

Ultra-high Performance for metal, asphalt, modified bitumen & rolled roofing.

Protects against moisture with a unique asphalt and aluminum formula. Reduces heat build-up to keep interiors cooler with energy savings of up to 30%. Covers approx. 80-100 sq. ft. 5-year warranty.



0110102 0.9 Gallon; 4/Ctn.

0110105 4.75 Gallons

Anvil Premium Fibered Elastomeric White Roof Coating

May be applied over new galvanized surfaces. Dries in 30-60 minutes. Second coat can be applied in 1-2 hours. Will not chalk, peel or drip. Coverage: approx. 150 sq. ft. per gallon for two coat coverage.



0110218 Quart; 9/Ctn. **0110215** 5 Gallon

0110216 2 Gallon **0110217** 1 Gallon; 4/Ctn.

Cool King Aluminum Roof Coating

Waterproofing asphaltum and high grade aluminum pigments plus non-asbestos fibers reflect up to 80% of the sun's rays. Dries silver. Prevents drying and cracking which cause leaks. Coverage: metal surfaces approx. 70-100 sq. ft. per gallon; composite surfaces approx. 40-60 sq. ft. per gallon.



0110652 5 Gallon

Aluminum Economy Roof Coating

For metal, asphalt, modified bitumen & rolled roofing

Asphalt based aluminum protects against moisture and damaging UV rays for energy savings of up to 20%. Covers approx. 50 sq. ft. per gallon.



0110108 0.9 Gallon; 4/Ctn.

0110110 4.75 Gallons

Not Stocked At All Locations

Anvil Elastomeric White Roof Coating

Superior performance and brilliant white good looks, superior to the usual home center products on the market, for when you need a competitively priced all-round elastomeric alternative.



0110225 5 Gallon

Elixir Economy Aluminum Roof Coating

Brush and trowel grade aluminum pigmented asphalt roof coating. Reinforced with fiber for strength; fills in irregular surfaces and flashing materials. Asphalt and metal roofs. Coverage: approx. 50-100 sq. ft. per gallon.



0110112 5 Gallon

Roof Coating/Sealant

UV Resistant Black Patch & Coat



Kool Seal UV-Resistant Patch & Coat is a fibered roof product specially formulated to withstand harsh sunlight and guaranteed to resist breakdown caused by UV radiation! Save time & money on recoats while avoiding potential roof damage.

0110223 10.5 fl oz
0110224 0.9 Gallon

Storm Patch Wet/Dry Roof Cement

All-weather, elastomeric, asphalt wet patch/roof cement. It displaces water from a wet surface and forms a tight seal. Can be used in hot or cold weather applications.



0110344 10.5 oz
0110345 0.9 Gallon

Storm Patch Clear Roof Cement

All-weather, clear, elastic sealant with excellent adhesion. Ideal for sealing leaks around vents, gutters, skylights and other roof materials when an invisible patch is desired.



Wet/cold application.
0110346 10 fl oz

Roofing Brush & Handle



0110601 7" Brush; 48/Ctn.
0110600 48" x 7/8" Handle; 50/Ctn.

Jisco Mixer

Mixes thick paints, pastes, joint cements, asphalt driveway sealers and roof coatings evenly in up to 5 gallons. Baffle Plate forces material down. Fits any 3/8" electric drill; 5/16" shaft 24" long. Scrapes sides of can completely.



0381005 6/Ctn.

Kool-Patch White Patching Cement

Kool Seal White Acrylic Patching Cement patches tough leaks and won't run or sag! After application it retains its flexibility to resist cracking, peeling, and blistering.



0110343 10.5 oz Tube
0110313 Quart
0110341 0.9 Gallon; 4/Ctn.

Black Jack Roof Cement



Asphalt sealer-filler patches cracks in roofing, firewalls, chimneys, gutters, flashing, etc. particularly for emergency repairs of wet surfaces. Apply with standard caulking gun. Cleanup with paint thinner or mineral spirits. Flexible. Cannot be painted.

0110425 10 oz.; 12/Ctn.

Anvil Caulk-Sealant

Dries flexible and contains superior bonding agent (silicone). Can be used on wood, concrete, baked enamel, glass and more. White.



0110311 Gallon; 4/Ctn.

Leak Stopper

- Lasts 2 - 3x longer than standard patches
- Specially designed for problem leaks
- Stops roof leaks instantly
- Permanent Repair
- Use in wet or dry conditions
- Rubberized to prevent cracking

Made with Penetrex™, a unique penetrating oil that forms a complete seal.

Apply with a trowel or putty knife. Covers approx. 12 sq. ft. per gallon when applied 1/8" thick.



0110420 11 Oz. Tube

Anvil Patcher/Sealer

Textured, ideal for sealing seams on roofs and awning rails. Adheres to any surface, such as galvanized roofing, without preparation.



0110220 Gallon



PEEL & SEAL™

SELF-STICK ROLL ROOFING

Peel & Seal

Peel off the release paper, press the material into place. It's that simple.

The perfect solution for low slope and dozens of other roofing problems, Peel & Seal installs using only a utility knife. You can forget big crews, hot kettles, torches, adhesives and fasteners. No coating is necessary. Adheres to most surfaces. It won't crack or dry out. Replaces old style rolled roofing products. It seals around most punctures. Perfect answer to roofing, waterproofing, patching, and repair. Rolls are 33.5 feet long.

- 0110350** Aluminum 6"; 6/Ctn.
- 0110351** White 6"; 6 Ctn.
- 0110352** Aluminum 36"; 1/Ctn.
- 0110353** White 36"; 1/Ctn.
- 0110354** Aluminum 18"; 1/Ctn.
- 0110355** Aluminum 12"; 1/Ctn.

Kool-Flex Blue Reinforcing Grid

Strong, flexible grid covers cracks 1/4" or more, seams and stress areas on existing roofing materials. Will not rot or corrode. Use with roof coating.



POP displays are available.

0110410 4" x 40'

KOOL-SEAL Flex Sealer

Fast, easy, permanent, flexible patch

Permanent, multi-purpose roof repair seals cracked or rusted flashings, vent pipes, rain gutters and downspouts. Use on shingles, metal, asphalt, tar, fiber, glass, concrete, wood, plastics and rubber.

Resists mold and mildew. Effective between -76° and 180° F. Non-toxic.



0110412 2" x 3' **0110414** 4" x 4' **0110413** 2" x 10'

Dyco C-10 Hypalon Flow Seal Caulk

Self-leveling, paintable, fast drying, weather resistant, will not surface harden or crack. Resists mold and mildew, fungus and bacteria. When cured, resists water, oil, grease, gasoline and many other chemicals. Forms a tough, flexible synthetic rubber seal, dries in 30 to 60 minutes. Second coats can be applied after 30-60 minutes. Semi-gloss sheen. Recommended for horizontal surfaces such as roofs on RVs, mobile homes, metal buildings, roofovers, vents, seams, inside gutters, etc. Easy cleanup with xylene solvent.



0110450 Gray 11 oz. tube.
0110451 White 11 oz. tube.


Surewall Surface Bonding Cement

SUREWALL® Surface Bonding Cement is a patented, Portland Cement glass fiber product, for use in building dry stack block walls without mortar joints. Fast, easy way to build walls that can stand up to 98 mph wind-driven rain.

- Glass Fiber Reinforced
- Reduces Sound Transmission
- Stucco Finish
- Stronger than Concrete Block Walls Built with Mortar

Exceeds ASTM C887 packaged materials for surface bonding mortar. Gray.

0110270 50 lb. bag



DAP Alex Plus Caulk with silicone

Superior quality, multi-purpose acrylic latex caulk plus silicone. Highly flexible and durable. Excellent adhesion. Cured caulk is mildew resistant. Interior/exterior use. Paintable. Water clean-up. 35 year durability guarantee. Exceeds ASTM specification C 834. Sealing around wood, vinyl, and aluminum siding & trim, caulking around windows and doors 10.1 fl oz.

- 0119010** Clear
- 0119011** White



DAP Dynaflex 230 Elastomeric Latex Sealant

Superior flexibility, durability, easy tooling, paintability and low odor. Excellent adhesion and watertight, weatherproof seal; mildew resistant when cured. Water clean-up, 50-year durability guarantee.

- 0110336** White 10.1 fl oz.
- 0110337** Clear 10.1 fl oz



DAP Kwik Seal Tub & Tile Caulk

Bonds like a glue and seals like a caulk. Provides a durable, watertight seal, excellent adhesion and flexibility. Tools easily, paintable, water clean-up.

- 0119000** Almond 6 oz
- 0119002** White 6 oz
- 0119001** White 10.1 oz



Pro Flex® Tripolymer Caulking Sealant

Single component, high performance elastomeric sealant. Super flexible, excellent adhesion even when damp, UV resistance, mildew resistant, resealable, may be applied over itself, asphalt compatible, paintable, no dirt pickup; easy to apply, non-stringing formula. 10 fl. oz.



- 0110383** Crystal Clear



Boss 378 Silicone Caulk

100% silicone caulk provides weatherproof and waterproof seal. Remains flexible and lasts for years under extreme temperature changes, moisture, weathering, vibration, expansion and contraction. Bonds to metal, glass, porcelain, ceramics, wood, fiberglass, many plastics and concrete. 10.3 oz.

- 0112004** Clear
- 0112005** White
- 0112006** Black
- 0112008** Almond



Painters Caulk

Single component, non-sag, guns easily. Flexible with excellent adhesion to common building materials. Minimal shrinkage. Tack free in 30 minutes. UV stable. Soap and water clean-up. 10 fl oz.

- 0119007** White, 25-years life expectancy
- 0119008** Clear, 40-years life expectancy



Skylight Sealant/Caulk

A non-skinning, high-quality, flexible, butyl gunnable sealant for splice joints, exterior perimeters, end dams and glazing seals. It is designed for use on working and nonworking joints, most substrates and non-exposed curtainwall joints. Excellent resistance to UV. Not intended for water immersion. Meets the requirements of Federal Specification TT-S-001657.

- 0110390** Black



DAP Window Glazing/Caulk

Smooth, easy-working compound for glazing wood, metal, and aluminum sash. Resists cracking, sagging, and chalking. Gun grade. 10.1 fl oz.

- 0110365** White




Acryl-R Narrow Joint Sealant

One-component solvent release sealant to seal mechanically fixed joints such as corner joints, flashing joints, screw heads and hidden wall system joints.

Excellent adhesion and weatherability. Apply with standard caulking gun. 11 oz.

- 0112410** Aluminum



Outdoor Improvements
Anchors & Set-Up Material
Doors & Windows
Coatings & Cleaners
Appliances
Tools & Hardware
Carpet & Flooring
Electrical
Plumbing
Towing & Safety
Heating & Cooling

Caulking Gun

Use with cartridges. Spring grip maintains steady pressure and even bead.



0112401

Sta'-Put Spray Adhesive

Works well on bottom board, vinyl tops, metal or vinyl trim, styrofoam, foam rubber, glass, plastics and much more. Gives high solids, water-resistant bonds offering quick tack, non-wrinkling and flexibility.

0110250 16 oz.; 12/Ctn.
0110253 40# Canister



Sta'-Put II Spray Adhesive

Spray directly onto polystyrene safely with no melt-down. Ready to bond in four minutes. Water resistant. Especially formulated for styrofoams.

0110252 13 oz.; 12/Ctn.

Sta'-Put High Temp Adhesive

For use where high temperatures are an issue. Flame resistant to approx. 225° F. Non-flammable after tacked. Welds onto surface after about one minute. Not as tacky to the touch, but offers a much stronger bond once cured.

0110256 12/Ctn.

Sta'-Put II Remover

Simplifies clean-up of overspray and removes bonded materials. Virtually no residue. Compatible with most surfaces. Not recommended for paper-printed wallpaper without vinyl coating.

0110254 12 oz.; 12/Ctn.

Caulk Finisher



POP displays available.

Scoops away excess caulk for a professionally finished joint. Works with all types of caulks and silicone sealers. Can be trimmed to desired bead for a variety of jobs.

0112402

Liquid Nails

Premium rubber-based adhesive bonds with virtually all materials, including wood, steel, plaster and concrete. Waterproof. Shear strength exceeding 400 psi — twice the strength of most other adhesives in a similar class. 10.5 oz.

0110255 For Interior Projects
0110257 For Subfloors (Exterior)
0110258 For Tubs and Surrounds
0110259 For Tubs and Surrounds
VOC Compliant



Kilz Upshot

Dependable Kilz stain-killer in a can, perfect for hard-to-reach places. Can even be used upright for ceilings. 10 oz. aerosol.

0185004



Kilz Primer-Sealer-Stain Killer Oil Based

White pigmented primer for wood, plaster, drywall and burned areas. Seals in water stains, pen, lipstick, crayon, grease and oil stains. Recoat in 30-45 minutes. Easy clean-up with paint thinner. Mild odor. Coverage: approx. 400 sq. ft. per gallon.



0185006 13 oz. Spray; 12/Ctn.
0185007 Gallon; 4/Ctn.

Kilz II Primer-Sealer-Stain Killer Water Based

White pigmented, very low odor. For interior and exterior surfaces. Seals in most stains. Can be recoated quickly. Easy clean-up with warm soapy water. Coverage: approx. 400 sq. ft. per gallon.



0185020 Gallon; 4/Ctn.

D-5

Specifications Subject to Change without Notice

Ceiling and Wall Repair

Homax Wall & Ceiling Repair Patch

For drywall, plaster and other flat surfaces. Metal patch with self-adhesive mesh backing permanently repairs holes in walls and ceilings. Refinish to create an invisible patch. Ideal for quick repair of interior drywall and plaster surfaces.



0260417 6" Patch

Pivoting Utility Blower with Grounded Outlets

- High Velocity Motor for Maximum Air Stream
- Three Powerful Speeds
- Two 120 Volt Grounded Outlets
- Rugged, Easy-to-Carry Handle
- Ten-Foot Cord with Grounded Plug
- Fully Assembled for Immediate Use

11.5" L x 9.25" W x 11.25" H
10.9 Lbs Shipping Weight



0420600



Easy-Touch Acoustic Texture

Patch "popcorn" or "cottage cheese" type ceiling textures fast. Contains actual polystyrene chips to match commercially applied ceiling textures.

Patch small areas up to 2 sq. ft. 16 oz.



0185028 Coarse



Easy-Touch Spray Texture

Fast-drying, oil-based. Three color-coded straws let you choose the perfect match for "orange peel" splatter textures. Up to 100 sq. ft. coverage.



0185026 20 oz.



Easy-Touch Knockdown Texture

Water-based. Matches knockdown "Mediterranean" and splatter-type wall and ceiling textures. Two different application straws allow you to choose between medium or heavy patterns. Patches small areas up to 8 sq. ft. Single can provides up to 16 sq. ft. coverage.



0185025 20 oz.

Easy-Touch Drywall Spray Texture


Water-based. Fast and easy way to patch orange peel and splatter drywall textures with the advantage of low odor and water cleanup. Different size spray patterns (fine, medium, and coarse) achieved with 1 of the 3 included color-coded straws. Covers up to 70 sq. ft. f or one 20 oz. can.



0185024 20 oz.

Acoustic Texture Kit

Kit includes sprayer and acoustic polystyrene chip texture.



0185030 Kit

Outdoor Improvements
 Anchors & Set-Up Material
 Doors & Windows
 Coatings & Cleaners
 Appliances
 Tools & Hardware
 Carpet & Flooring
 Electrical
 Plumbing
 Towing & Safety
 Heating & Cooling

DAP Wallboard Joint Compound

Smooth, high quality finishing of gypsum panel joints. 3 lb. tub



0119006

DAP Vinyl Interior Spackling

For plaster, drywall and wood surfaces. 5.5 fl. oz. tube, white.



0119005

Wallboard Paint


Off-White - 5 gallon



0185038

Putty Knife

High impact plastic. 3.5" long handles and 3.5" long blades. Hang hole.




- 0381105 2"
- 0381106 3"
- 0381107 4"

Wood-Tone Putty

Latex putty in a convenient tube fills nail holes and defects. Dries hard, cleans up with water. 1.05 fl. oz.

- 0181520 White
- 0181521 Walnut
- 0181522 Cherry
- 0181523 American Oak
- 0181524 Golden Oak

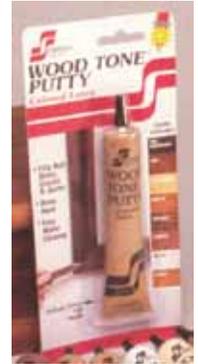

Appliance Touch-Up Paint



Fast, easy, economical way to repair chipped, nicked or scratch appliances. Handy brush included.

- Dries Quickly
- Waterproof
- Won't Chip or Crack

0185011 White; 12/Ctn.

Spot Remover & Carpet Cleaner

GTO is formulated to remove tough stains from carpeting, rugs & upholstery. Reaches deep into the stained area to dissolve grease, oil and many other stubborn stains. GTO is formulated not to set in stains.

Removes grease, tar and oily soil.



0181350 20 fl oz. spray: 12/Ctn.

Boss Biggies Dual Sided Abrasive Wipes



Dual sided abrasive wipes clean paint, adhesives, oils and more from hands, tools and surfaces

0181401 80 wipes / tub

Vent Mate Register Air Filters

Fits most registers. Non-toxic. Excellent for allergy sufferers and asthmatics. Easy to install in just seconds. Fragrance lasts approximately three months. Packaged for pegboard display. Saran-coating locks in fragrance.



Traps and controls:

- Pollen
- Dust and dust mites
- Tobacco odors
- Mold, mildew and fungi spores



- 0180205 Potpourri; 3/Pk.
- 0180206 Pine; 3/Pk.

D-7

Misc. Supplies

Zoom Oiler

All-purpose oil with extra long telescoping nozzle for hard-to-reach places. Nozzle can be retracted when not in use. 4 oz.



0180101 12/Ctn.

WD-40 Lubricant

General purpose lubricant stops squeaks, loosens rust and protects metals. Spray can with extension nozzle for hard-to-reach places. 8 oz.



0180104 12/Ctn.

Boss 699 Wasp and Hornet Killer

Quickly and effectively kills wasps, hornets and bees. Safe for use around electrical equipment.

Jets up to 12 ft. stream.



0181818 14 oz. can

Fin Tool



All metal tool straightens and cleans condenser and evaporator fins. Works on all units. Heavy-duty spring wire bristles automatically adjust to all spacings. Tension adjustment band allows maximum rigidity and ease of operation. Straightens even the most severely damaged fins.

0380028

Coil & Fin Cleaner/Degreaser

RCD Coil and Fin Cleaner cleans and degreases air conditioning and refrigeration equipment (Condenser & Evaporator Coils) to insure efficient operation and to help prevent overheating and motor burnout due to accumulated dust, dirt and grease in air spaces. Contains no solvents, acids or alkalis. Use on automobile radiators, heat pumps, electrostatic filters, refrigerators, air conditioners and cooling units. Eliminates the need for high pressure sprayers or bulky tank sprayers. Heavy Duty Foaming, Water-Based, Powerful Blast Spray.



0181375 18 fl oz. can

Trailer Glitter

By Camco. Removes black streaks, renews sheen to metal, fiberglass, plastic, wood, painted or acrylic surfaces and other hard surfaces. Non-flammable, non-abrasive.



0180801 32 oz.; 14/Ctn.

0180802 Gallon; 6/Ctn.

All-Direction Insulating Foam

All-direction dispenser lets you apply foam from any direction or angle, even upside-down or sideways.



0112010 12 oz

Black Streak Remover

Use as 100% spray to quickly and easily remove even stubborn streaks caused by window and door sealants. Will not harm painted finishes. Also removes tree sap and bugs.



0180804 32 oz.; 4/Ctn.

Bath/Tub Repair Kit

Comes with everything for the most demanding repairs to all types of plastics, fiberglass and even enamel bath fixtures. Shower stall cracks can be repaired in minutes. For both white and almond.



0110235

Two-Component Polyurethane Foam Kits

Portable, disposable and self-contained with color-coded, pre-connected hoses. These kits are available in sizes from 15-600 board feet and provide a quick consistent flow of foam that dries in under a minute. Foam expands 30X.

Touch 'n Seal Two Component Foam Kits are portable, self-contained dispensing systems. When used according to manufacturer's directions, these systems supply thermal insulating and sound attenuating 2-component

polyurethane spray foams. Touch 'n Seal spray foams are permanent and dry within minutes of application.

Touch 'n Seal Spray Foam Kits use disposable, pressurized chemical cylinders to dispense polyurethane spray foams eliminating the need for external air compressors, pumping equipment or dry nitrogen. These systems provide quick and easy foam application for repairs and renovations, new installations and production applications.



2-Component spray foam systems provide fast, even foam flow that cures in about 45 seconds, making it ideal for use on large gaps and on all surfaces.

Foam kits include applicator gun and 10' hose, and illustrated directions. Kits are self contained, portable, and disposable. Contains no CFC's, no urea formaldehyde.

Standard

0112102 2 Part, 200 Board Feet

0112104 2 Part, 600 Board Feet

Fire Retardant

ASTM E84 rating: flame spread 15, smoke developed 10.

0112107 2 Part, 200 Board Feet

0112108 2 Part, 600 Board Feet

Replacement Nozzles

0112131 L Fan Nozzle Kit, Yellow
25/Box

0112132 Conical Nozzle Kit, Clear
25/Box



CPDS 1000 System Constant Pressure Dispensing System



Tanks sold separately.

The Touch 'n Seal CPDS 1000 is an inexpensive, low maintenance dispensing mechanism that, when used according to manufacturer's directions, applies Class I fire retardant, thermal insulating and sound attenuating 2-component polyurethane spray foam.

Height	49 in (125 em)
Depth	33 in (84 em)
Width	24.5 in (62 em)
Foam Delivery Rate @ 160 psi	4.0 lbs (1.8 kg) / minute
Foam Delivery Rate @ 200 psi	5.5 lbs (2.5 kg) / minute
Maximum Hose Length	150 ft (46 m)
Power Source	120V, 15 amp
Alternate Power Sources	Pressurized Dry Nitrogen, Compressed Air
Foam Type	CP 750 FR, 2 Component, Fire Retardant, 1.75 PCF CP 1200 FR, 2 Component, Fire Retardant, 1.0 PCF

0112150 Dispensing System

0112151 Closed Cell Foam Tank

Handi Tools



FOMO

0112025 H300 dispensing gun, with plastic handle.



FOMO

0112026 H500 Dispensing Gun, Steel Handle and Tip.



FOMO

0112027 H700 dispensing gun, steel replaceable parts.

0112024 Plastic Disposable Extension Tips For Dispensing Guns. Used for accessing very small cracks and crevices. 5/Bag

Handi Foam Polyurethane Sealant

Polyurethane foam sealants are moisture-cured, designed to completely fill and seal small gaps, cracks and voids. This one-component polyurethane is used in a bead application.

- 0112019** Tank only 7128 bead ft., (I-160)
- 0112018** Tank w/accs. 8688 bead ft.,(I-160)
- 0112038** Tank only 11406 bead ft.,(I-260)
- 0112039** Tank w/accs. 13914 bead ft.,(I-260)
- 0112021** 24 oz.,(680-G)
- 0112029** 25' Hose assembly

FOMO



Replacement Nozzles

Fan nozzles dispense foam in a fan pattern and are best for spraying larger open area surfaces, such as walls and between floor and ceiling joists.

Cone Nozzles are designed to dispense in a steady stream, this makes them ideal for closed wall cavities and large voids.



0112031 Fan Spray Nozzle 8/Pk.



0112032 Cone Spray Nozzle 8/Pk.

Handi Foam

Polyurethane Sealant with straw applicator.

FOMO

- 0112023** 12 oz.
- 0112012** 20 oz.
- 0112011** 29 oz.
- 0112021** 24 oz. .



Handi Cleaner

Handi Cleaner cleaning agent, used to dissolve uncured or fresh polyurethane foam as well as dispensing guns.

FOMO

0112014, 12 oz.



Handi Foam Quick Cure Spray Foam

Fomo's disposable foam kits are chemically cured, two-component polyurethane froth foam kits, designed to fill large voids and surfaces. Cures in minutes. Kits are packaged with the patented Handi-Gun®.

- 0112015** Covers 205 Bd Ft
- 0112016** Covers 105 Bd Ft
- 0112017** Covers 605 Bd Ft
- 0112042** Covers 22 Bd Ft



FOMO

Handi Foam Fire Block FOMO



Closed cell polyurethane sealant, provides an R-value of 4-5/inch. Orange colored for easier ID by codes officials.

0112022 Handi Foam® Fireblock Sealant. Pressurized Can, Requires Dispensing Gun. 24 oz.



Handi Seal® Window & Door Sealant

The Dry-Seal Technology™ is the only patented formula designed to prevent moisture and mold problems by repelling water.

- 0112013** Requires Dispensing Gun, 24 oz. Pressurized Can
- 0112020** With Straw Applicator, 24 oz. Pressurized Can

FOMO

Insulation



Stock #	Item Desc	Manufacture
0270403	Applegate Loose Fill Cellulose 26.5 LBS	Applegate Manufacturing
0270409	Applegate Borate Cellulose 26.5 LBS	Applegate Manufacturing
0270400	Insul-Safe SP Fiberglass Blowing Insulation	Certainteed Corp Insulation Group
0270404	Certainteed Optima Blowing Insulation	Certainteed Corp Insulation Group
0270410	15X93 BATT R-19 8/bag Certainteed	Certainteed Corp Insulation Group
0270411	15X48 BATT R-38 7/bag Certainteed	Certainteed Corp Insulation Group
0270412	23X48 BATT R-38 6/bag Certainteed	Certainteed Corp Insulation Group
0270413	23X93 BATT R-19 8/bag Certainteed	Certainteed Corp Insulation Group
0270414	15.25x94 BATT R-19 8/bag	Certainteed Corp Insulation Group
0270415	23X96 BATT R-19 Unfaced 8/bag	Certainteed Corp Insulation Group
0270416	16X96 R-19 Foil Faced BATT 8/bag	Certainteed Corp Insulation Group
0270417	24X48 R-19 Foil Faced 16/bag	Certainteed Corp Insulation Group
0270406	Green Fiber Loose-Fill Cellulose	Green Fiber
0270402	Attic Guard Plus Fiberglass Insulation	Guardian Building Products
0270405	Applegate Stabilized Cellulose 26.5LBS	Guardian Building Products
0270407	15X93 BATT R-19 10/bag Guardian	Guardian Building Products
0270408	23X94 BATT R-19 10/bag Guardian	Guardian Building Products
0270401	Cellulose Insulation - Pro 50 by Regal	Regal Industries
0270440	16" 500/bag Insulation Hangers	
0270441	23" 500/bag Insulation Hangers	

rFoil HVAC Duct Insulation and Tape

rFOIL™ Duct Insulation is a double layer of polyethylene bubbles sandwiched between two highly reflective radiant barriers. This inspector-friendly tape means no hassles at the job site, and peace of mind for installers. Prevents condensation.



rFoil

0270529 4' x 100'

0270531 3' x 100'

0270532 4' x 125'

0270534 4' x 50'

Tape

0270530 2.5" x 180' roll

Pine Wood Plugs

Slightly tapered for easy insertion. The top 1/8 is the full diameter measurement for a tight even fit. Made from kiln dried lumber and produced on specially designed equipment, resulting in quality, uniformly-sized plugs. No splintered face edges. Packaged in 250 count bags



0270427 1" Plug

0270428 2" Plug

Long-Barrell Plastic Plugs

The Long Nose, with its exceptional design, is our best plastic plug. With a 5/8" shank and heavy gripping teeth, this plug will hold in both single and multiple layers of siding. Extra wide cap has a tapered edge for obscured vision on sidings and a textured top for easy painting. 250 per bag. 2000 per box.



0270425 1" Plug

0270426 2" Plug"

Foam Drywall Plugs

Styrofoam plugs used for holes in drywall- recessed to accept spackling compound. They absorb little moisture, thus require fewer layers of spackling for a smooth finish. 1000 per package.



0270429 1" Plug

0270430 2" Plug

Wasp Insulation Blower

The WASP represents the best insulation blowing technology available, refined and enhanced with your ideas and suggestions. What's more, the WASP utilizes proven airlock technology for simplicity

and minimal downtime. The result is the best lightweight machine on the market, tailored to meet your demanding requirements.

0380410



FORCE/2 Insulation Blower

Professional Grade – Virtually Indestructible!

The FORCE/2 is the insulation blower you want when you need a larger, stronger machine. With an 8½ cu. ft. hopper that can hold 50 lbs of material, a strong 1½ hp motor and a powerful 3.6 PSI blower, the FORCE/2 blows up to 2,012 lbs of light density cellulose and 428 lbs of fiberglass per hour. And for the more demanding

jobs, the FORCE/2 is now available with an incredible 4.5 PSI, 116 CFM blower. Easy setup, operation and cleanup. It takes only four switches to operate the FORCE/2. No complicated gauges, dials, or knobs.

0380453



BLOWERS COME COMPLETE WITH:

- 100 feet of 3 inch blowing hose
- One 3 inch stainless steel hose connector
- Three 3 inch stainless steel hose clamps
- Two 100 foot power cords
- 100 foot dual remote control
- Variable speed blower pressure control
- Airlock stainless steel inserts
- Pinset material slide gate